


Fabric LumiBox - SLB05

Features



- No borders or frames
- Available in custom sizes
- Suitable for large scale surfaces
- Easy to hang
- Rigid structure
- Patented heat sink technology to maximize led lifespan (50,000 hours)
- Low power consumption (LED Backlit)
- Energy saving and maintenance free
- Superior consistent light quality
- Advanced 5-year warranty

Description


The biggest advantage of Fabric LumiBox is it has no borders and frames, which enhances the visuals. LumiBox is a flexible option as its thinness allows easy mounting or placement onto various platforms. The illumination helps bring out the pictures' full colors, depths and details.

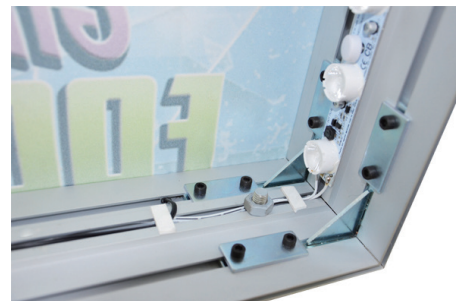

Technical Drawing

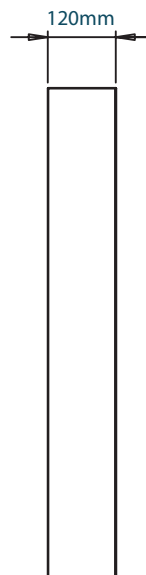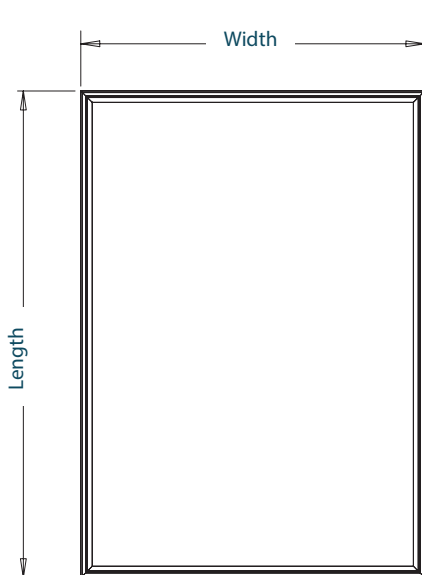

Section Interior View

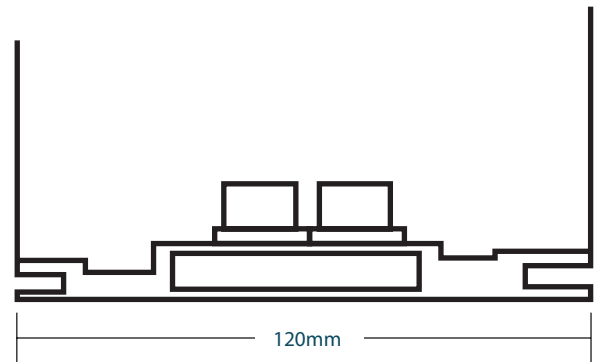

Specification

Electrical		
Lumens Output	High Lumen	Ultra Bright Lumen
Power/m	1W/unit	1W/unit
Input Voltage	12V, 24V	
Wire Size	20 AWG 2 Wires , 20 AWG 3 Wires , 22 AWG 4 Wires	
Wiring	Each LumiBox requires direct connection to power supply	
Connector	2.1 / 5.5mm Barrel Plug , IP65 , Bare Wires	

Physical	
Mounting	Screws Z-clips U-shapes Mirror clips Standoffs
Operating Temperature	-30°C (-22°F) ~ +40°C (+104°F)

Frame	
Minimum Size	297mm x 210mm
Maximum Size	1414mm x 1000mm
Frame Width of Border	-----
Frame Thickness	90mm
Frame Material and Colors	Alloy Aluminum Custom Color

Color	
Color Temperatures	Warm White: 3000K
	Neutral White: 4000K
	Cool White: 5000K
	Daylight: 6000K
	Tunable White: 3000K - 6500K
	Single Color
	Adjustable RGB

Version	Size (mm)	Weight (KG)
V1	1414 x 1000	25.5
V2	841 x 594	9.2
V3	594 x 420	4.5
V4	297 x 210	1.1
C	Custom sizes	

Ordering Informtion

Sample Number : SLB05 - HIGH - V1 - BACK - 3000K - BARREL

Series	Lumen	Version	Power Exit	Color	Connector
SLB05	High Ultra Bright	V1 V2 V3 V4 C	Back Edge Special	White 3000K 4000K 5000K 6000K Tunable White 3000K - 6500K Color Single RGB	Barrel IP65 Bare